


# Duct Galv. QF

## L=1500 (For Dia. 100-710)

Ø mm	O/D mm	I/D mm	Rolled Edge (nom. mm.)	Length (nom. mm)	Weight kg	Galvanised Steel
80	79	78	6	1200	1.9	0.7
100	98	97	6	1500	2.8	
125	124	123	6		3.4	
140	139	138	6		4.0	
150	148	147	6		4.2	
160	159	158	6		4.5	
180	179	178	8		5.1	
200	200	199	8		5.7	
224	224	223	8		6.2	
250	250	249	8		7.1	
280	279	278	8		8.2	
315	313	312	10		8.8	
350	348	347	10		9.9	
400	400	398	10		13.6	
450	449	447	10		15.3	
500	499	497	10	17.5		
560	559	557	10	18.7		
630	629	627	10	21.6		
710	709	707	10	24.4		

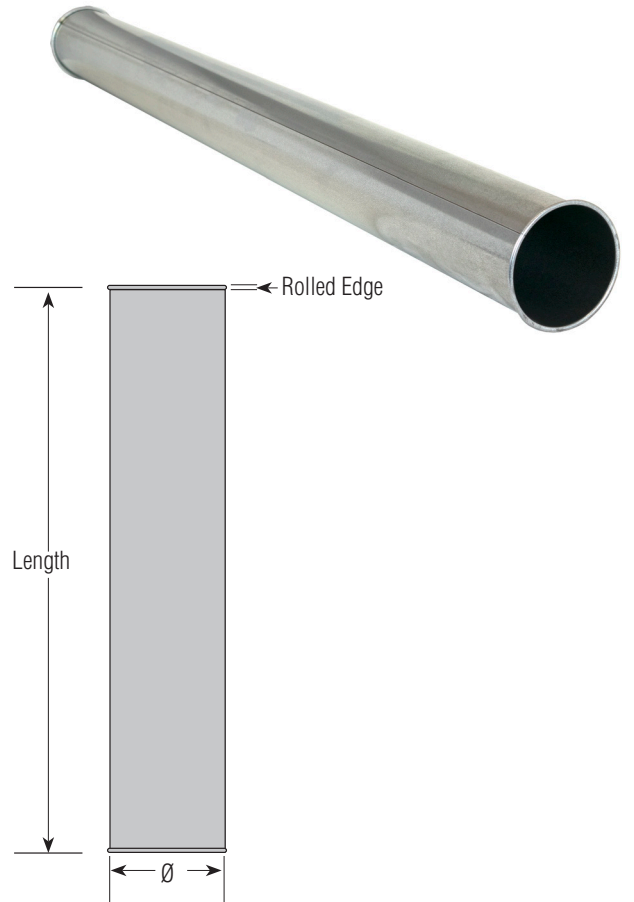

**Construction**  
Longitudinal seam type: groove (lockform) seam

**Ends**  
QF (Quick-Fit rolled edge). **If flanged duct is needed**, please see our Technical Data sheet Flanged Duct.

Temperature Rating of Product Components		
° C	Straight Duct	Sealants
200°	Galvanised Steel	3M Metal Sealant 2084
121°		
-20°		

Additional Notes
At temperatures ranging between 200° C and 250° C, the zinc-iron alloy layers in galvanised steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is 200° C.

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
Straight Duct	Galvanised	JIS G 3302 with G90 Rating
3M Metal Sealant 2084	Acetone blend	AAMA Specification 801.1

