


# Flexible Polyurethane Hose

Ø mm	Bend Radius mm	Vacuum m.H2O	WP Bar	Wall mm	Max Coil Size Mtr	Weight gr/mtr
38	38	4.8	1.5	0.5	20	166
51	51	3.5	1.2	0.55	20	280
63	63	2.5	0.9	0.55	20	320
76	76	2	0.8	0.6	20	440
82	82	2	0.7	0.6	20	490
89	89	2	0.7	0.6	20	520
102	102	1.5	0.6	0.65	20	660
127	127	1.5	0.5	0.65	20	800
140	140	1.5	0.5	0.65	20	900
152	152	1	0.4	0.7	20	1100
160	160	1	0.4	0.7	20	1160
180	180	1	0.4	0.7	20	1300
203	203	1	0.3	0.7	20	1440
229	229	0.5	0.3	0.7	10	1580
254	254	0.5	0.2	0.8	10	1880
315	315	0.3	0.15	0.8	10	2390
350						
400						
450						
500						

N/A

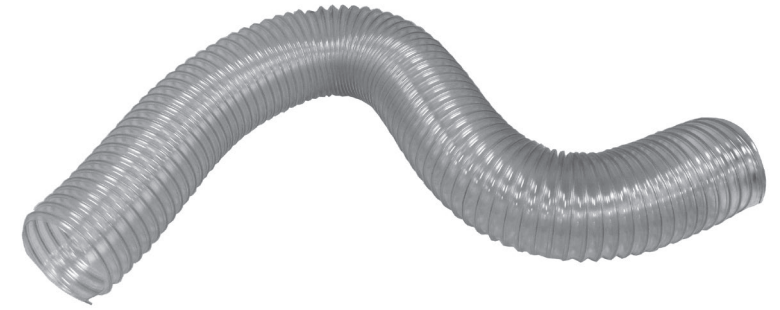

Available in 6 meter lengths

### Temperature Rating of Product Components

° C	Hose
80°	Polyurethane hose
-40°	(intermittent up to 125° max for short periods)