


Ø mm	L mm	Galvanised Steel Thickness mm	Weight kg
100	280	1,0	2,1
125	295	1,0	3,8
150	315	1,0	3,9
180	360	1,0	4,5
200	360	1,0	5,0
250	350	1,0	9,0
300	420	1,0	9,3

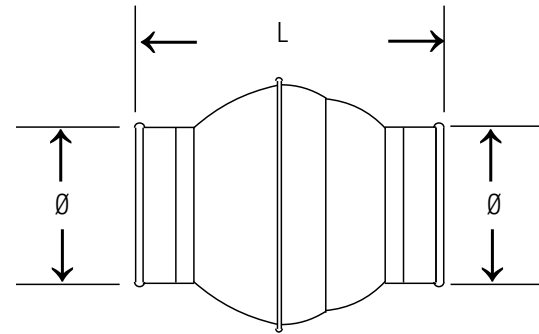

**Ends:** 6 mm turned out edge (FB)

### Additional Notes

To have movable connection between duct and PU-Hose. The ball joint could turn 360° and angeling 22° from centerline.

Recommended max. service temperature is +80°C.

### Compliance / Rating of Product Components

Product	Material	Compliance / Rating
FB Ball Joint	Galvanised	DX51D with Z275 Coating

### Temperature Rating of Product Components

	FB Ball Joint
80°C	Galvanised Steel
-20°C	

