

TECHNICAL DATA SHEET: KVDA SPLIT STRAP & KVDD LEGS FOR SPLIT STRAP

KVDA Split Strap, Galvanised


Ø mm	Length mm	Thickness mm
080	25	3
100	25	3
120	25	3
125	25	3
140	25	3
150	25	3
160	25	3
180	25	3
200	25	3
224	25	3
250	25	3
280	30	3
300	30	3
315	30	3
325	30	3
350	30	3
400	30	3
450	30	3
500	30	3
550	40	3
560	40	3
600	40	3
630	40	3
650	40	3
710	40	3
800	40	3

KVDA Split Strap, Mild Steel

Ø mm	Length mm	Thickness mm
150	40	5
160	40	5
180	40	5
200	40	5
220	40	5
225	40	5
250	40	5
300	40	5
315	40	5
350	40	5
400	40	5
450	40	5
500	40	5
550	40	5
560	40	6
600	40	6
630	40	6
650	40	6
700	40	6
750	40	6
800	40	6
850	40	6
900	40	6
950	40	6
1000	40	6

KVDD Legs for Split Strap, Galvanised

Ø mm	Length mm	Thickness mm	Weight kg
80 - 160	65	2,5	0,1
180 - 315	65	2,5	0,2
350	235	3,0	0,4
400	260	3,0	0,4
450	285	3,0	0,5
500	310	3,0	0,5
550	375	3,0	0,6
600	400	3,0	0,6
650	425	3,0	0,7
700	450	3,0	0,7
800	500	3,0	0,8

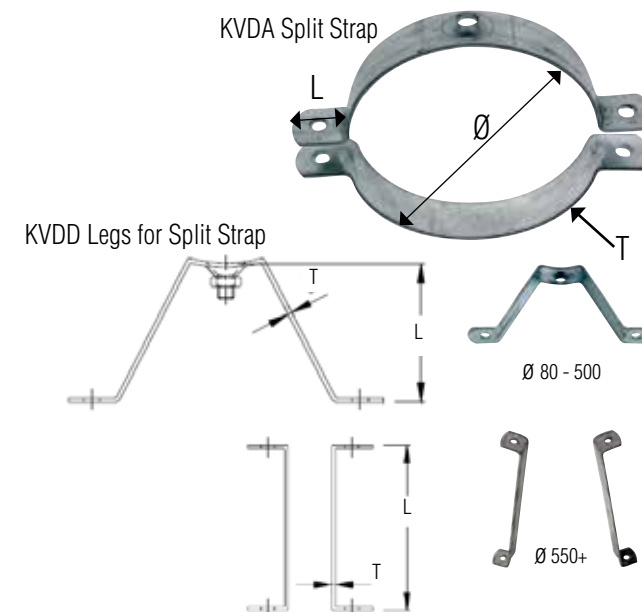

Additional Notes

- Galvanised steel quality DX51D with Z275 coating. Mild Steel quality S235JR/EN. Stainless Steel quality EN.14301/EN.
- Base and top coat in RAL 7032 grey, 50 microns. Other colors available upon request.
- Max. working temperature of the surface treatment is +200°C.
- Recommended max. service temperature is +80°C.

Compliance / Rating of Product Components

Product	Material	Compliance / Rating
KVDA / KVDD	Galvanised Steel	DX51D with Z275 coating
KVDA	Mild Steel	S235JR/EN

Temperature Rating of Product Components

Welded KVDA / KVDD Split Strap			
200°C	Galvanised Steel	Mild Steel	Base and Top Coat RAL 7032 grey
-20°C			

