


TECHNICAL DATA SHEET: QUICK-FIT (QF) BALL JOINT

Ø mm	Rolled Edge (nom. mm)	Height mm	Width mm	Aluminium Steel Thickness mm	Weight kg
100	6	325	210	1.5	0.6
125	6	310	210	1.5	0.7
150	6	300	265	1.5	1.1
160	6	300	265	1.5	1.1
200	8	375	365	1.5	1.8
250	8	380	365	1.5	2.3
300	10	490	445	2.0	3.3

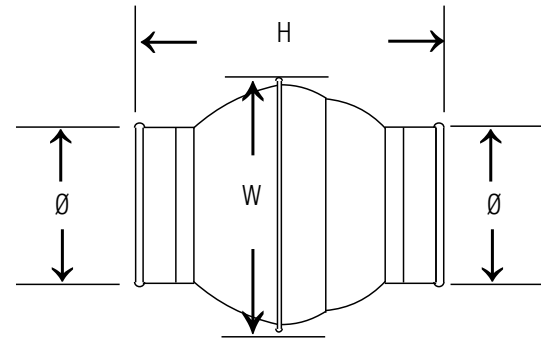

Ends: QF (Quick-Fit rolled edge).

Additional Notes

To have movable connection between duct and PU-Hose. The ball joint can rotate 360°, with an average angle from centreline of 26°.

Recommended max. service temperature is +80°C.

Compliance / Rating of Product Components

Product	Material	Compliance / Rating
QF Ball Joint	Aluminium	1050 / O condition H12 Conforms to European certification BSEN485
QF Smooth Adapter	Galvanised	DX51D with Z275 Coating

Temperature Rating of Product Components

	Quick-Fit (QF) Ball Joint
+80°C	Galvanised Steel / Aluminium
-20°C	

