
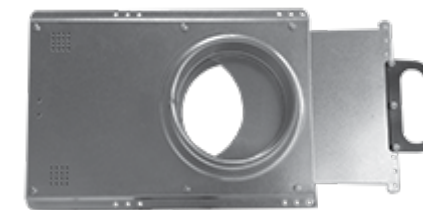


TECHNICAL DATA SHEET: SBMS Manual Damper

Ø mm	A mm	B mm	C mm	D mm	E mm	Weight kg	Galvanised Steel Thickness mm
080	397	197	133	185	254	3,0	0,9
100	509	217	133	220	289	3,0	0,9
125	564	242	133	248	316	3,5	0,9
140	619	257	133	275	344	4,0	0,9
150	629	267	133	280	349	4,0	0,9
160	679	277	133	305	374	4,5	0,9
180	739	297	133	335	404	5,0	0,9
200	799	317	133	365	434	6,0	0,9
224	883	341	133	407	476	6,5	0,9
250	949	367	133	440	509	7,5	0,9
300	1099	417	133	515	584	9,5	0,9
315	1144	432	133	538	606	10,0	0,9
350	1279	467	133	605	674	11,5	0,9
400	1429	517	133	680	479	14,0	0,9

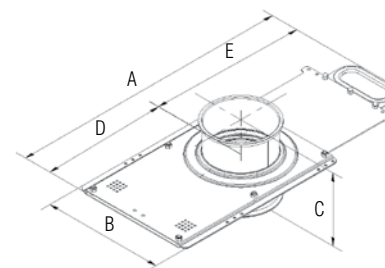

Ends: Standard QF end can be changed to Raw ID (I/D), Raw OD (O/D), Hose Adapter (FX), Flat Bar Flange (FL), or 6 mm turned out edge (FB).

Additional Notes

Recommended max. service temperature is +75°C.

The SBMS type energy saving damper is a manually operated blast gate or sliding damper.

Compliance / Rating of Product Components

Product	Material	Compliance / Rating
SBMS Manual Damper	Galvanised	DX51D with Z275 Coating
Joka Seal Metal Sealant 2315	Aceton Blend	AAMA Specification 801.1
Sealing Ring	Poron Ring	PEHD/PORON

Temperature Rating of Product Components

	SBMS Manual Damper	Sealant	Poron Ring
200°C	Galvanised Steel	Joka Seal Metal Sealant 2315	Poron Ring
121°C			
75°C			
-10°C			
-20°C			

