


\varnothing_A mm	\varnothing_A O/D mm	\varnothing_A I/D mm	Rolled Edge (nom. mm)	Galvanised Steel Thickness mm
100	98	97	6	0,7
125	124	123	6	0,7
140	139	138	6	0,7
150	148	147	6	0,7
160	159	158	6	0,7
180	179	178	8	0,7
200	200	199	8	0,7
224	224	223	8	0,7
250	250	249	8	0,7
300	298	297	10	0,7
315	313	312	10	0,7
350	348	347	10	0,7
400	400	398	10	0,9
450	449	447	10	0,9
500	499	497	10	0,9
560	559	557	10	0,9
630	629	627	10	0,9
710	709	707	10	0,9



- No. of connections (from 2 to 8) and shape (round or rectangular) must be specified.
- $\varnothing 2$ edge type must be specified (example: hose connection).
- Available in diameters 100 - 710 mm.

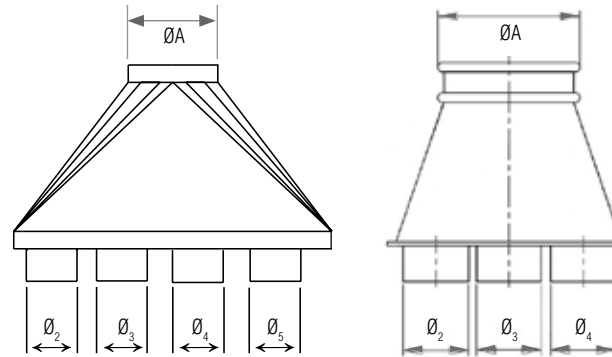

Construction:

Seam: Longitudinal seam is lapped, spot welded, and caulked.

Ends: Standard QF end can be changed to Raw ID (I/D), Raw OD (O/D), Hose Adapter (FX), Flat Bar Flange (FL), or 6 mm turned out edge (FB).

Additional Notes

At temperatures ranging between 200° C and 250° C, the zinc-iron alloy layers in galvanised steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is +80° C.

Compliance / Rating of Product Components

Product	Material	Compliance / Rating
Suction Hood	Galvanised	DX51D with Z275 Coating
Joka Seal Metal Sealant 2315	Aceton Blend	AAMA Specification 801.1

Temperature Rating of Product Components

	Suction Hood	Sealant
200°C	Galvanised Steel	Joka Seal Metal Sealant 2315
121°C		
-20°C		

