


Hose Clamp

Ø mm	Hose sizes mm	Band Width mm	Band Thickness mm	Recommended Torque Nm	Max Torque Nm	Max Pressure PSi
60-80	63	13.0	0.914	6.7	9.0	44
70-90	76			6.7	9.0	44
70-90	82			6.7	9.0	44
80-100	89			6.7	9.0	44
90-110	102			6.7	9.0	44
110-130	110			6.7	9.0	44
120-140	127			6.7	9.0	44
130-150	140			5.9	7.9	18
140-160	152			5.9	7.9	18
150-170	160			5.9	7.9	18
170-190	180			5.9	7.9	18
200-220	203			5.9	7.9	18
230-250	229			5.9	7.9	18
260-280	254			5.9	7.9	18
258-355	305, 315			5.9	7.9	18

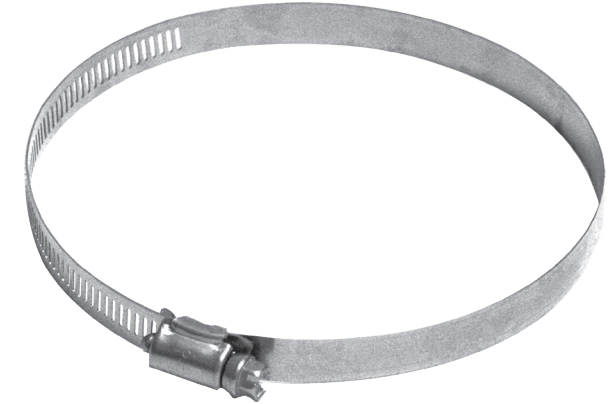

Temperature Rating of Product Components	
° C	Hose Clamp
200°	Galvanised Steel
-20°	

Additional Notes
At temperatures ranging between 200° C and 250° C, the zinc-iron alloy layers in galvanised steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is 200° C.

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
Hose Clamp	Galvanised	JIS G 3302 with G90 Rating