


TECHNICAL DATA SHEET: HIGH VACUUM BRANCH PIPE PARALLEL

Ø mm	Length mm	Galvanised Steel / 304SS Thickness mm	Galvanised Steel / 304SS Weight kg
102-102-102	350	2,0	2,7
152-152-102	250	2,0	2,6

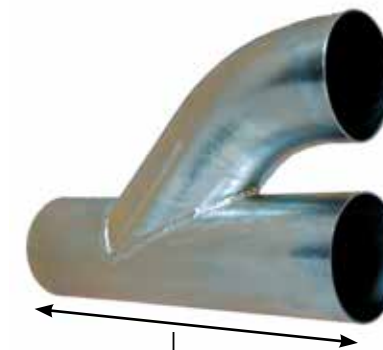

Compliance / Rating of Product Components

Product	Material	Compliance / Rating
Branch Pipe Parallel	Galvanised	EN 10305 - 03 / DIN 2394 DIN 21151 NFA 49.645 BS 6323 ASTM A513/A787-5
Branch Pipe Parallel	304 Stainless Steel	SS-EN 10204 with 3.1 material certificate (must be requested upon placing order)

Temperature Rating of Product Components

	Branch Pipe Parallel	
200°C	Galvanised Steel	304 Stainless Steel
121°C		
-20°C		

Additional Notes

At temperatures ranging between 200° C and 250° C, the zinc-iron alloy layers in galvanised steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is +80° C.

RA- certified finishing and EL-polishing certificate for pharmaceutical industry is available as option.

